



# Solid State Slot Bagel/Bun Toaster Model BTW09/BTW24



**BTW09/BTW24**

### Application

Commercial pop-up toaster is designed to quickly toast bagels and hamburger buns. Only one heating element provided for each slot permits "one-sided toasting."

### General Information

Commercial four-slot pop-up type electronic toaster has four toasting slots in the top. Each slot is 1 5/8" (41mm)W x 5 1/4" (133mm)L. Each toasting chamber is equipped with oven, guide wires, and lowering rack. Overall dimensions are 11 1/16" (291mm)W x 13" (330mm)D and 9 3/8" (233mm)H.

Model BTW Series Toasters Feature:

- Solid state timer-control
- Electrical heating elements that provide uniform heat and even toasting
- Operating lever and color selection knob for each pair of toasting slots
- Removable crumb tray

### Construction

Construction is of formed and welded sheet steel. Finish is brushed stainless steel with a bright anneal (mirrored) finish on the front panel. A front pull-out crumb tray is provided.

### Electrical

Total rated input for the 120V Model BTW09 is 1.8 kW. Total rated input for the 208/240V Model BTW24 is 1.6 kW at 208V or 1.8 kW at 240V. All BTW09 & BTW24 models are single phase. The toaster is equipped with a two-pole microswitch for each pair of slots that energizes the elements when the respective operating lever is depressed. All wiring connects in a junction box at the rear. BTW09 and BTW24 toasters are furnished with factory installed 36" cord with NEMA Standard 5-20P plug or NEMA Standard 6-15P plug respectively.

### Heating

An insulated ceramic etched foil heater is installed on the left side of each toasting chamber.

### Controls

Each two-slot section is separately controlled by a lever operated mechanism. It is equipped with a color selector knob coupled with solid state controls having temperature and voltage compensators. When operating lever is depressed, bread racks are lowered, and elements are energized simultaneously. At the end of the toasting cycle, elements are de-energized, and bread racks are automatically raised by a coil spring.

### Capacity

The BTW09/BTW24 can toast approximately 300 bagel halves or 240 English muffins per hour.

### Approximate Weights

18 lbs. installed, 21 lbs. shipping.


### No Quibble Warranty

Warranted for one year covering parts and labor.

### Ordering Information

BTW09/BTW24 four-slot bagel/muffin toaster.



- BTW09 - 120V, 1-Phase, 50/60 Hz.
- BTW24 - 208/240V, 1-Phase, 50/60 Hz.

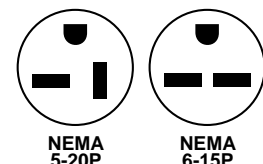

# Solid State Slot Bagel Toaster

## Model BTW09/BTW24

NOTE: All Figures In Parentheses Are In Millimeters.

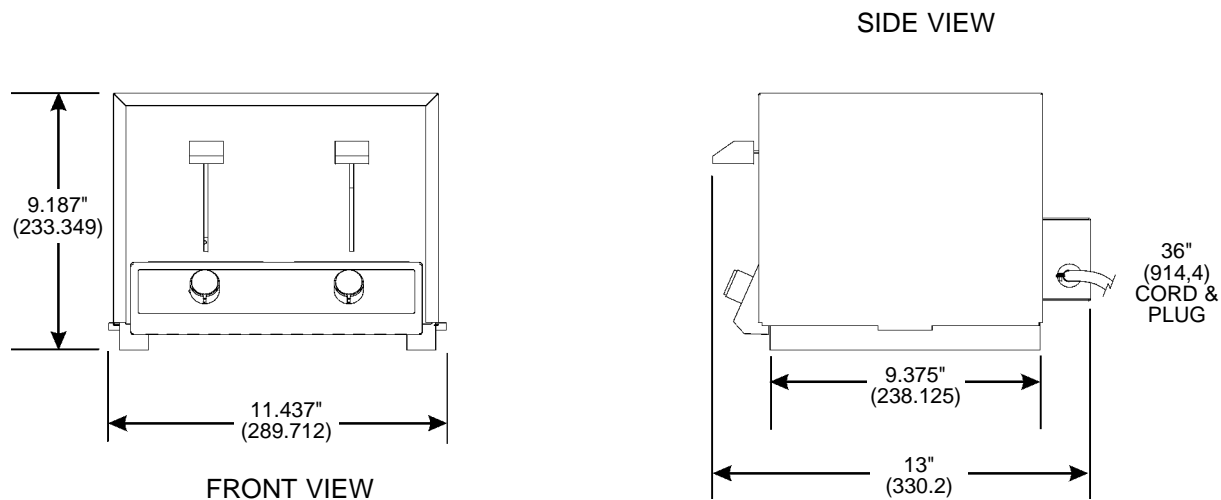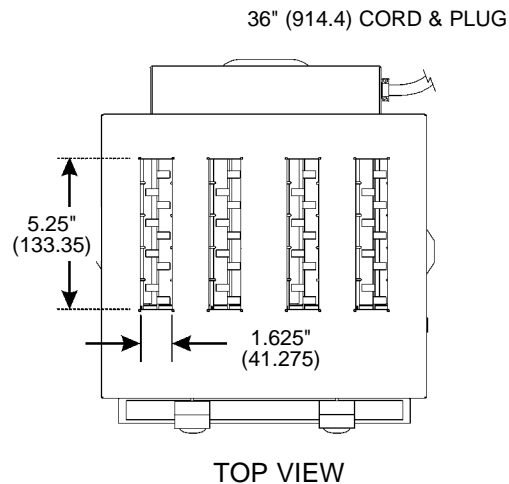

### GENERAL INFORMATION

Model	Width	Height	Depth	Net Weight	Ship Weight
BTW09/BTW24	11 $\frac{1}{16}$ " (291)	9 $\frac{9}{16}$ " (233)	13" (330)	18 lbs. 8.2 kg	21 lbs 9.5 kg

### ELECTRICAL INFORMATION

Model#	Voltage	Phase	Hz	kW	Amps	Plug Type
BTW09	120	1	50/60	1.8	15.0	NEMA 5-20P
BTW24	208/240	1	50/60	1.6/1.8	7.7/7.5	NEMA 6-15P

**INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.**

Toastmaster, in line with its policy to continually improve its products, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.

**Toastmaster**

**THE MIDDLEBY CORPORATION**  
THE BRAND BEHIND THE BRANDS

1400 Toastmaster Drive, Elgin, IL 60120-9272 USA • 1-800-323-2210 • Fax: 1-800-635-4725

www.middleby.com