



Maxi Conveyor Toaster Model TC21A



TC21A

Electrical

Available in 208V or 240V, 1 Phase only, the total rated input is 2.9 kW at 208 and 240 volts. A factory installed 44" cord is attached.

Heating

When control is set to "on", top and bottom tubular elements will turn on to toast both sides of bread. Lightness and darkness of the product is achieved by adjusting the top and bottom heat controls. Standby position allows for energy savings during non-peak periods.

Controls

Rotary 3-position dial selects On/Off/Standby positions. A conveyor speed dial controls the belt speed. Heat dials control the upper and lower heating elements.

Capacity

- Model TC21A, at 208V, or 240V, 1400+ bread slices per hour of medium toast.
- Preheat time is 15 minutes

Approximate Weight


52 lbs. net, 58 lbs. shipping.
May be shipped via UPS.

Warranty

Warranty includes two year parts and labor, on-site service. (U.S.A. only).

Ordering Information

- TC21A - 208V, 1-Phase, 50/60 Hz.
- TC21A - 240V, 1-Phase, 50/60 Hz.



NEMA
6-20P

Application

Maxi conveyor toasters are designed to uniformly toast breads, buns, bagels, English muffins and many other food items in large quantities using continuous feed methods.

General Information

Feed tray connects to front without tools. Tray is angled to feed continuously. Overall dimensions are 14¹/₆"W x 27"D x 14¹/₆"H including 4¹/₄" NSF listed, non-slip legs. The toasting chamber is 10¹/₂"W with 1¹/₂"H entrance. Unit is shipped as a front return model, but can easily be converted to rear exit in the field.

Safety

Unique air flow design keeps case, top, and sides cool. The unit is equipped with an auto cool down feature which allows the fan to cool the outer skin when the unit is turned off.

Construction


Steel construction with a stainless steel finish is used for durability. A removable full-length slide-out crumb tray makes clean-up easy.



Conveyor Food Toaster

Model TC21A

NOTE: All Figures In Parentheses Are In Millimeters.

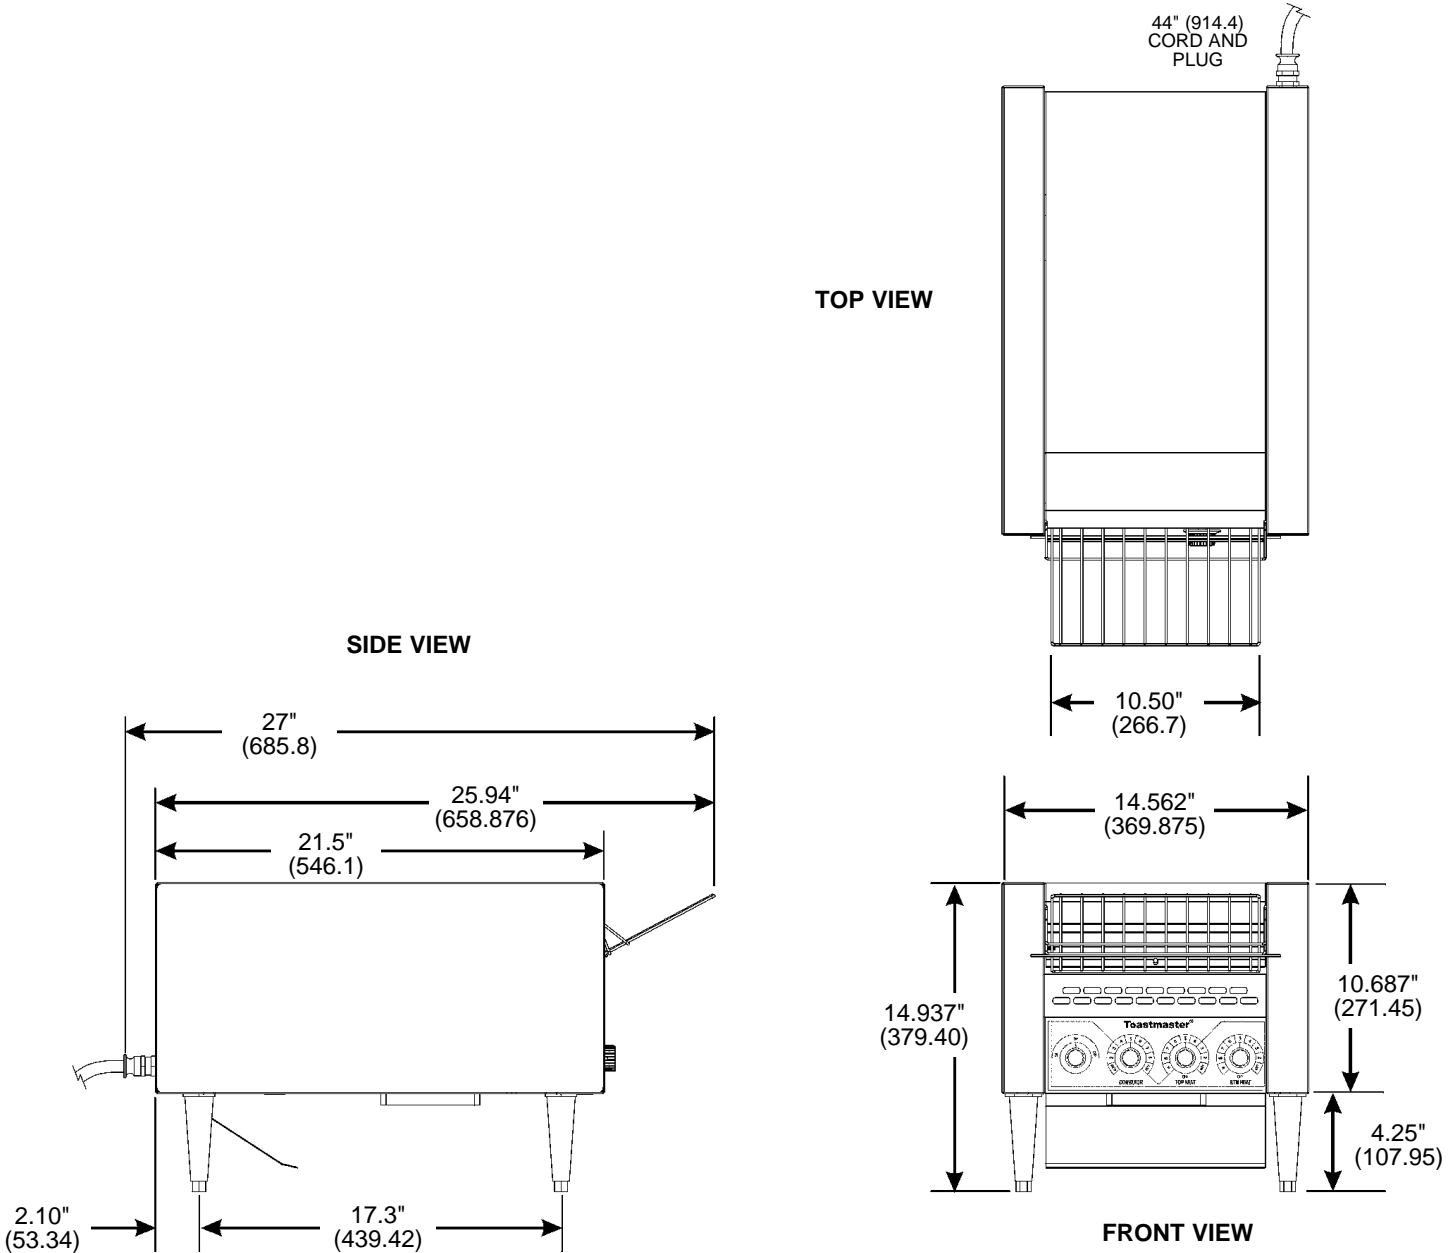

GENERAL INFORMATION

Model	Width	Height	Depth	Net Weight	Ship Weight
TC21A	14.562" (369.875)	14.937" (379.4)	21.5" (686)	52 lbs. 23.6 kg	58 lbs 26.3 kg

ELECTRICAL INFORMATION

Model#	Voltage	Phase	Hz	kW	Amps	Plug Type
TC21A	208	1	50/60	2.9	13.9	NEMA 6-20P
TC21A	240	1	50/60	2.9	12.1	NEMA 6-20P

INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.

Toastmaster, in line with its policy to continually improve its products, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.



1400 Toastmaster Drive, Elgin, IL 60120-9272 USA • 1-800-323-2210 • Fax: 1-800-635-4725

www.middleby.com